



CORE SERIES SX36 RANGE

36" Range with 6 Open Burners



Model SX36-6BN

SPECIFIER STATEMENT

36" wide Core Series light-duty range, Vulcan Model No. SX36-6BN. Stainless steel front, sides, backriser, high shelf and bullnose. High temperature burner T knobs with set screw. Porcelain door liner and oven bottom. Six 28,000 BTU/hr. cast top burners with lift-off burner heads. Shrouded flash tube pilot system (one pilot per two burners). 12" x 12" cast top grates with aeration bowls. Heavy duty top grates and burner heads. Compression spring door hinge system for durability. 30,000 BTU/hr. Standard oven measures 26 $\frac{3}{4}$ "w x 26"d x 13 $\frac{3}{4}$ "h. Thermostat adjusts from 250° to 500°F. One oven rack with four rack positions. $\frac{3}{4}$ " rear gas connection and gas pressure regulator. Total input: 198,000 BTH/hr.

Exterior Dimensions:

36"W x 33 $\frac{1}{4}$ "D x 60 $\frac{3}{8}$ "H on 6" adjustable legs.



Intertek

Project _____

AIA # _____ SIS # _____

Item # _____ Quantity _____ C.S.I. Section 114000

☐ **SX36-6BN** 1 Standard Oven / Natural Gas

☐ **SX36-6BP** 1 Standard Oven / Propane

STANDARD FEATURES

- Stainless steel front, sides, backriser, lift-off high shelf.
- 6" Stainless steel adjustable legs.
- 28,000 BTU/hr open top burners with lift-off heads.
- Shrouded flash tube pilot system (one pilot per two burners).
- 12" x 12" cast top grates with aeration bowls.
- 30,000 BTU/hr standard oven cavity measures 26 $\frac{3}{4}$ "w x 26"d x 13 $\frac{3}{4}$ "h.
- Oven thermostat adjusts from 250° to 500°F.
- One oven rack and four rack positions.
- $\frac{3}{4}$ " rear gas connection and gas pressure regulator.
- One year limited parts and labor warranty.

ACCESSORIES *(packaged & sold separately)*

- ☐ Extra oven rack.
- ☐ Reinforced backriser and high shelf for mounting salamander broiler.
- ☐ Set of four casters (two locking).

CORE SERIES - SX36 - 36" RANGE WITH 6 OPEN BURNERS

Approved by _____ Date _____ Approved by _____ Date _____



CORE SERIES - SX36 RANGE



36" Range with 6 Open Burners

1. A pressure regulator sized for this unit is included. Natural gas 5.0" W.C., propane gas 10.0" W.C.
2. Gas line connecting to range must be $\frac{3}{4}$ " or larger. If flexible connectors are used, the inside diameter must be $\frac{3}{4}$ " or larger.
3. For proper combustion, install equipment on adjustable legs or casters provided with unit.

Specify type of gas when ordering.

Specify altitude when above 2,000 feet.

Clearances	Combustible	Non-Combustible
Rear	12"	6"
Right Side	10"	0"
Left Side	10"	0"

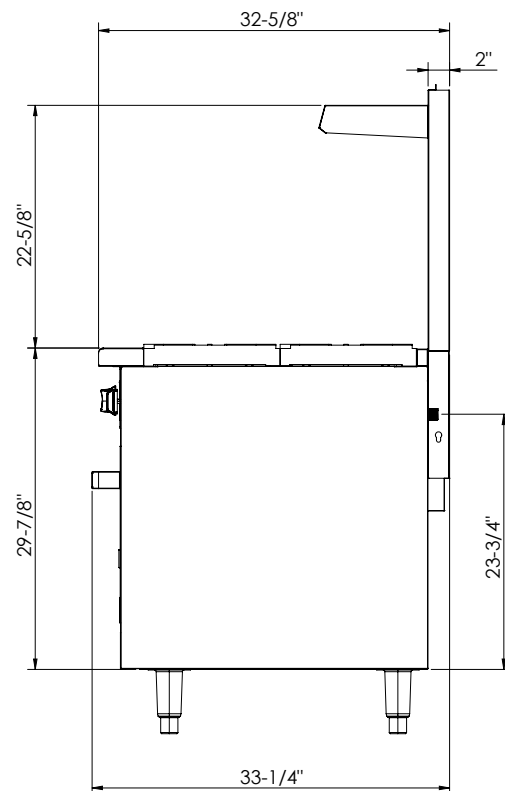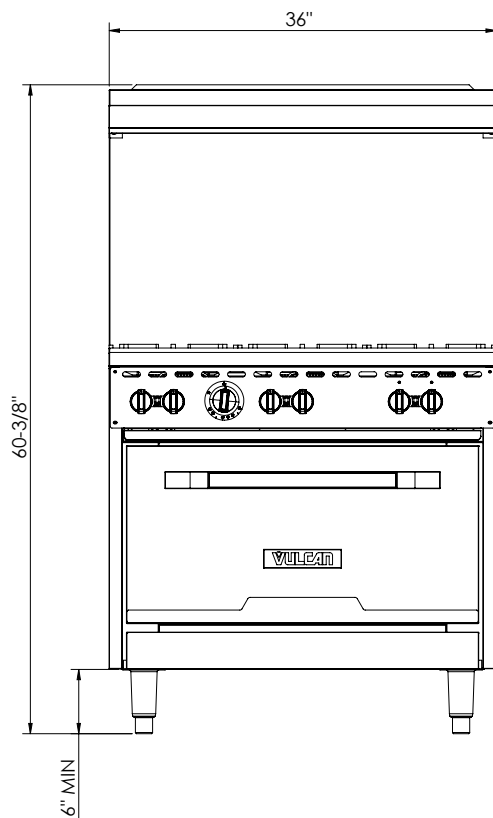

Top Configuration	Model Number	Description	Total Input BTU / Hr	Shipping Weight LBS / KG
	SX36-6BN	6 Burners / 1 Standard Oven / Natural Gas	198,000	456 / 207
	SX36-6BP	6 Burners / 1 Standard Oven / Propane	198,000	456 / 207

This appliance is manufactured for commercial use only and is not intended for home use.

As continued product improvement is a policy of Vulcan, specifications are subject to change without notice.